
ALLIED MOULDED PRODUCTS, Inc.

419-636-4217
222 N. Union St.
Bryan, OH 43506

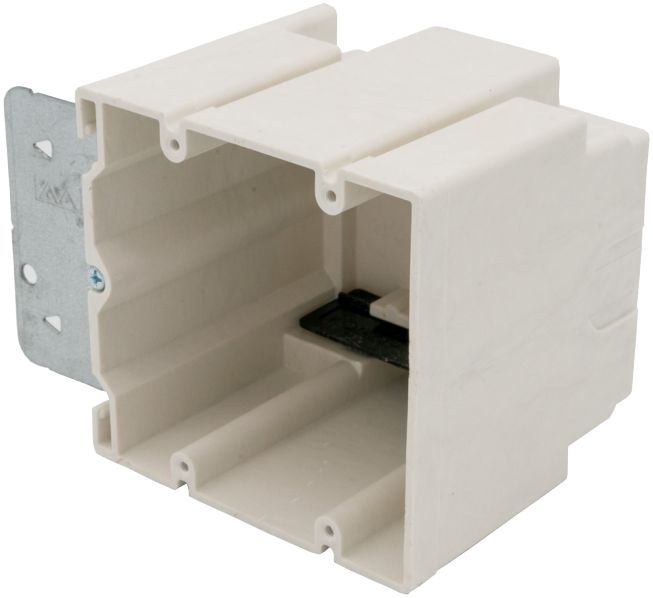

2302-ABKSC
Two gang fiberglass adjustable electrical box for use with nonmetallic sheathed cable.

Carton Quantity: 12

Box Type: Wall - Switch/Receptacle

Box Features: Adjustable box (SLIDERBOX®)

Installation Type: New Work, Old Work

Height: 3.86 in

Width: 4.03 in

Depth: 3.63 in

Volume: 42.5 cu in

Number of Gangs: 2

Product Info

Brand: SLIDERBOX

UPC: 85339989391

Carton Weight: 10 lbs

Carton Length: 12 in

Carton Width: 9.5 in

Carton Height: 8.25 in

Country of Origin: United States of America

Color: Off white

Patents: Patent Pending

Material: Fiberglass reinforced polyester

Additional Materials: Galvanized steel brackets and plated carbon steel fasteners, Polyvinyl chloride clamps

Features:

• fiberglassBOX® material, so no putty pad is needed when
following the Uniform Building Code (3″ minimum horizontal
distance between boxes)
• Sound rated up to STC (Sound Transmission Class) rating of 54
• 0″-2″ of adjustability to fit most wall finishes and arrives preset
for 1/2″ standard drywall applications
• 6-32 UNC tapped holes for easy device mounting
• Corrosion resistant metal bracket for a solid hold to a wood or metal
wall stud
• 220V clamp for 6-8 AWG NM wire
• (4) Clamps for 10-14 AWG NM wire

Application:

New & old work residential construction 2 HR fire resistive walls

Standards:

ANSI / UL 514C: File No. E30594

UL LISTED

WARNING – PROP 65
Click here for more information!

Fire Classification:

Fire Test of Building Construction Materials

ANSI / UL 263: File No. CEYY.R9379 (Category / File No.)

Note: Products must also be certified to: ANSI / UL 514C

Fire Resistance Classification in Wall Assemblies 2-Hours or less

Shall be separated by a horizontal distance of not less than 3 inches

Note: For more details please refer to the UL fire resistive directory and Allied Moulded's CEYY.9379 (Outlet boxes and fittings classified for fire resistance)