




**ALLIED  
MOULDED  
PRODUCTS, Inc.**

**419-636-4217  
222 N. Union St.  
Bryan, OH 43506**

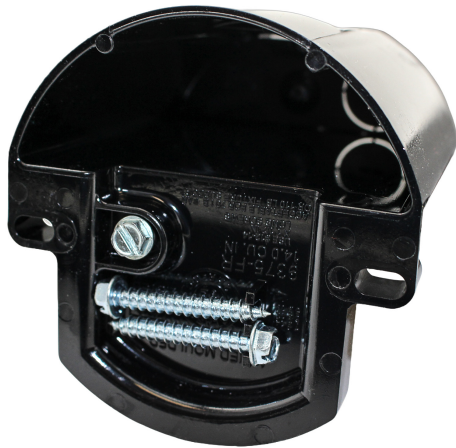

## 9375-FR

4" dia. round fan support box for use with nonmetallic sheathed cable

**Carton Quantity:** 24

**Mounting Description:** Bottom mount

**Box Type:** Ceiling - Fan/Fixture

**Installation Type:** New Work, Old Work

**Width:** 4 in

**Depth:** 3-13/16 in

**Volume:** 14 cu in

**Fan Rating:** 70lbs

**Fixture Rating:** 110lbs

## Product Info

**Brand:** flexBOX

**UPC:** 85339792918

**UNSPSC:** 39121316

**Carton Weight:** 7 lbs

**Carton Length:** 13 in

**Carton Width:** 8 in

**Carton Height:** 11 in

**Country of Origin:** United States of America

**Color:** Black

**Patents:** U.S. Patent No. 6,365,831 B1

**Material:** Polycarbonate

**Additional Materials:** Plated carbon steel fasteners

**Box Diameter:** 4

### Features:

1/2" deep base with side cube wiring capacity, fan/fixture screws for joist mounting

### Application:

New and old work residential construction 2 HR fire resistive walls and ceilings (70 lbs. fan support and 110 lbs. fixture support)

**Box Diameter:** 4

### Standards:

ANSI / UL 514C: [File No. E30594](#)



**LISTED**

**⚠ WARNING - PROP 65**  
[Click here for more information!](#)

### Fire Classification:

#### Fire Test of Building Construction Materials

ANSI / UL 263: File No. CEYY.R9379 (Category / File No.)  
Note: Products must also be certified to: ANSI / UL 514C

#### Fire Resistance Classification in Wall Assemblies 2-Hours or less

Shall be separated by a horizontal distance of not less than 3 inches

### **Fire Resistance Classification in Floor-Ceiling Assemblies 2-Hours or Less**

Distance between boxes in adjacent cavities may be reduced to 5 ½ inches

*Note: For more details please refer to the UL fire resistive directory and Allied Moulded's CEYY.9379 (Outlet boxes and fittings classified for fire resistance)*

---