




**ALLIED  
MOULDED  
PRODUCTS, Inc.**

419-636-4217  
222 N. Union St.  
Bryan, OH 43506

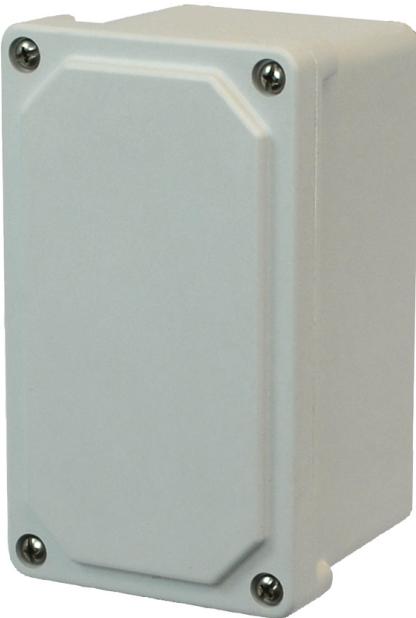

## AM743SF

7"x4"x3" AM Series fiberglass small junction box with 4-screw lift-off cover

### Availability:

For up-to-date delivery on this product, please contact us at 866-283-9324 or [sales@alliedmoulded.com](mailto:sales@alliedmoulded.com)

**Enclosure Type:** Small Junction

**Cover Type:** Opaque

**Closure Type:** 4-Screw Lift-Off

**Box Features:**

**Installation Type:**

**Height:** 6.01 in

**Width:** 3.31 in

**Depth:** 3.13 in

**Usable Depth:** 3.06 in

**Volume:** 71 cu in

## Product Info

**Brand:** AM Series

**UPC:** 85339910091

**UNSPSC:** 39121324

**Carton Quantity:** 1

**Carton Weight:** 2 lbs

**Carton Length:** 4 in

**Carton Width:** 4 in

**Carton Height:** 8 in

**Country of Origin:** United States of America

**Color:** Gray (RAL 7035)

**Material:** ULTRAGUARD® Fiberglass reinforced polyester - compression molded SMC box and Cover

**Additional Materials:** 316 stainless steel external hardware (hinges/latches/fasteners), Plated carbon steel internal hardware, Brass inserts, Polyurethane (FIP) Formed-In-Place gasket system

### Features:

Non-corrosive, non-conductive, light weight with lower installation cost, easy to modify and longer life cycle compared to steel. Rigid design with back panel inserts plus stainless steel fasteners and an formed in place polyurethane gasket system encased in a continuous channel on the cover.

### Application:

Enclose and protect electrical and electronic controls, instruments or components for indoor and outdoor applications. Especially well suited for extreme temperature and corrosive environments.

### Standards:

UL 508A, UL 50 and UL 50E Types 1, 2, 3, 3R, 4, 4X, 12 and 13; [File No. E120175](#)

Complies with:

1. EN / IEC 60204-1 and 60529 Type IP66
2. RoHS directive



 **WARNING - PROP 65**  
[Click here for more information!](#)