




**ALLIED  
MOULDED  
PRODUCTS, Inc.**

**419-636-4217  
222 N. Union St.  
Bryan, OH 43506**

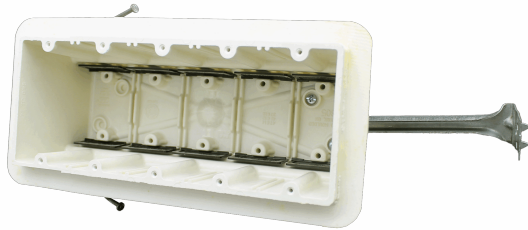

## Product Info

**Brand:** Vapor Seal

**UPC:** 85339180128

**UNSPSC:** 39121308

**Carton Weight:** 11 lbs

**Carton Length:** 16 in

**Carton Width:** 15 in

**Carton Height:** 9 in

**Country of Origin:** United States of America

**Color:** Off white

**Patents:** U.S. Patent No. 6,908,003 B2

**Material:** Fiberglass reinforced polyester

**Additional Materials:** Carbon steel fasteners, Galvanized steel brackets and plated carbon steel fasteners, Polyurethane flange, Polyvinyl chloride clamps

## 5305-NBKV

Five gang electrical box for use with nonmetallic sheathed cable

**Carton Quantity:** 6

**Mounting Description:** Angled mid nails with adjustable stabilizer bar

**Box Type:** Wall - Switch/Receptacle

**Box Features:** Adjustable stabilizing bar, Air-sealed flange (energy efficient), Nails, Speed "K" nonmetallic clamps

**Installation Type:** New Work

**Height:** 3-3/4 in

**Width:** 9-5/16 in

**Depth:** 3-9/16 in

**Volume:** 94 cu in

**Number of Gangs:** 5

### Features:

Machine tapped device holes, slot provision for low voltage divider, offset gauge marks, leveling ribs, rigid hard box construction, no distortion with high temperatures, shatter resistant with low temperatures, Speed "K" Clamps factory installed

### Application:

New work residential construction 2 HR fire resistive walls - air-sealed electrical boxes for envelope walls in Energy Star homes

### Standards:

ANSI / UL 514C: [File No. E30594](#)



**LISTED**

NEMA OS 4 - Energy Efficient Air-Sealed Boxes for Electrical Applications



**WARNING** - PROP 65

[Click here for more information!](#)

### Fire Classification:

### Fire Test of Building Construction Materials

ANSI / UL 263: File No. CEYY.R9379 (Category / File No.)

*Note: Products must also be certified to: ANSI / UL 514C*

**Fire Resistance Classification in Wall Assemblies 2-Hours or less**

Shall be separated by a horizontal distance of not less than 24 inches

*Note: For more details please refer to the UL fire resistive directory and Allied Moulded's CEYY.9379 (Outlet boxes and fittings classified for fire resistance)*

---