




**ALLIED  
MOULDED  
PRODUCTS, Inc.**

**419-636-4217  
222 N. Union St.  
Bryan, OH 43506**

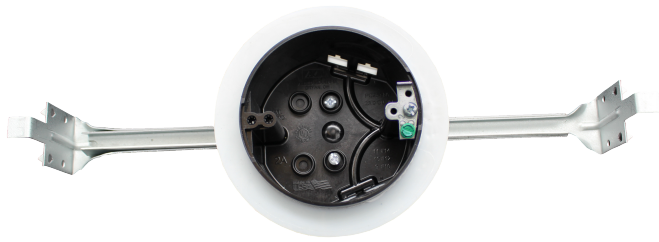

## Product Info

**Brand:** Vapor Seal FlexBOX

**UPC:** 085339 989363

**UNSPSC:** 10085339 989360

**Carton Weight:** 12 lbs

**Carton Length:** 22 in

**Carton Width:** 12 in

**Carton Height:** 14 in

**Country of Origin:** United States of America

**Color:** Black

**Patents:** Patent Pending

**Material:** Polycarbonate

**Additional Materials:** Carbon steel fasteners

**Box Diameter:** 4

## PC234-BHGV

4" dia. round VaporSeal® fixture support box for use with nonmetallic sheathed cable with grounding strap, aid in gaining Energy Star Rating

**Carton Quantity:** 18

**Mounting Description:** Adjustable bar hanger - 16" to 24" on center joist application

**Box Type:** Ceiling - Fixture

**Box Features:** Bar hanger

**Installation Type:** New Work

**Width:** 4" (Box), 5-1/2" (Vapor Seal) in

**Depth:** 2-5/16 in

**Volume:** 23 cu in

**Fixture Rating:** 50lbs

### Features:

Thermoplastic Polyester Elastomer (TPE) flange for single 1/2" & 5/8" drywall offset, Molded-in splined device holes, sealed TPE Clamps

### Application:

New work residential construction 2 HR fire resistive walls and ceilings (50 lbs. fixture support)

**Box Diameter:** 4

### Standards:

ANSI / UL 514C: [File No. E30594](#)



**LISTED**

NEMA OS 4 - Energy Efficient Air-Sealed Boxes for Electrical Applications



**WARNING** - PROP 65  
[Click here for more information!](#)

### Fire Classification:

#### Fire Test of Building Construction Materials

ANSI / UL 263: File No. CEYY.R9379 (Category / File No.)

*Note: Products must also be certified to: ANSI / UL 514C*

#### Fire Resistance Classification in Floor-Ceiling

**Assemblies 2-Hours or Less**

Distance between boxes in adjacent cavities may be reduced to 5 ½ inches

*Note: For more details please refer to the UL fire resistive directory and Allied Moulded's CEYY.9379 (Outlet boxes and fittings classified for fire resistance)*

---