




**ALLIED
MOULDED
PRODUCTS, Inc.**

**419-636-4217
222 N. Union St.
Bryan, OH 43506**

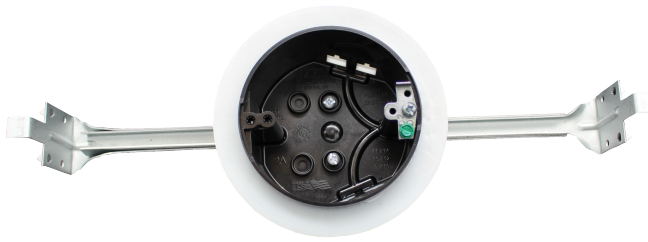

Product Info

Brand: Vapor Seal FlexBOX

UPC: 085339 989363

UNSPSC: 10085339 989360

Carton Weight: 12 lbs

Carton Length: 22 in

Carton Width: 12 in

Carton Height: 14 in

Country of Origin: United States of America

Color: Black

Patents: Patent Pending

Material: Polycarbonate

Additional Materials: Carbon steel fasteners

Box Diameter: 4

PC234-BHGV

4" dia. round VaporSeal® fixture support box for use with nonmetallic sheathed cable with grounding strap, aid in gaining Energy Star Rating

Carton Quantity: 18

Mounting Description: Adjustable bar hanger - 16" to 24" on center joist application

Box Type: Ceiling - Fixture

Box Features: Bar hanger

Installation Type: New Work

Width: 4" (Box), 5-1/2" (Vapor Seal) in

Depth: 2-5/16 in

Volume: 23 cu in

Fixture Rating: 50lbs

Features:

Thermoplastic Polyester Elastomer (TPE) flange for single 1/2" & 5/8" drywall offset, Molded-in splined device holes, sealed TPE Clamps

Application:

New work residential construction 2 HR fire resistive walls and ceilings (50 lbs. fixture support)

Box Diameter: 4

Standards:

ANSI / UL 514C: [File No. E30594](#)



LISTED

NEMA OS 4 - Energy Efficient Air-Sealed Boxes for Electrical Applications



! WARNING - PROP 65
[Click here for more information!](#)

Fire Classification:

Fire Test of Building Construction Materials

ANSI / UL 263: File No. CEYY.R9379 (Category / File No.)

Note: Products must also be certified to: ANSI / UL 514C

Fire Resistance Classification in Floor-Ceiling

Assemblies 2-Hours or Less

Distance between boxes in adjacent cavities may be reduced to 5 ½ inches

Note: For more details please refer to the UL fire resistive directory and Allied Moulded's CEYY.9379 (Outlet boxes and fittings classified for fire resistance)
