




**ALLIED
MOULDED
PRODUCTS, Inc.**

**419-636-4217
222 N. Union St.
Bryan, OH 43506**

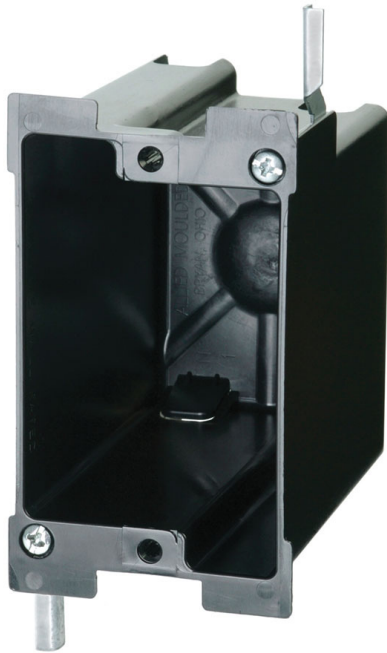

Product Info

Brand: flexBOX

UPC: 85339249139

UNSPSC: 39121308

Carton Weight: 14 lbs

Carton Length: 24 in

Carton Width: 10 in

Carton Height: 8 in

Country of Origin: United States of America

Color: Black

Patents: U.S. Patent No. 6,365,831 B1

Material: Polyvinyl Chloride

Additional Materials: Galvanized steel brackets and plated carbon steel fasteners

P-1220W

Single gang electrical box for use with nonmetallic sheathed cable

Carton Quantity: 48

Mounting Description: Metal wing brackets/nonmetal ears wall compression

Box Type: Wall - Switch/Receptacle

Box Features: Nonmetal ears, Wing bracket

Installation Type: Old Work

Height: 3-3/4 in

Width: 2-5/16 in

Depth: 3-3/4 in

Volume: 22.5 cu in

Number of Gangs: 1

Features:

Molded-in spline device holes, rectangular exterior for easy cut-in

Application:

Old work residential construction 2 HR fire resistive walls

Standards:

ANSI / UL 514C: [File No. E30594](#)



LISTED

⚠ WARNING - PROP 65
[Click here for more information!](#)

Fire Classification:

Fire Test of Building Construction Materials
ANSI / UL 263: File No. CEYY.R9379 (Category / File No.)

Note: Products must also be certified to: ANSI / UL 514C

Fire Resistance Classification in Wall Assemblies 2-Hours or less

Shall be separated by a horizontal distance of not less than 24 inches

Fire Resistance Classification in Floor-Ceiling Assemblies 2-Hours or Less

Distance between boxes must be 4-½ feet from one another

Note: For more details please refer to the UL fire resistive directory and Allied Moulded's CEYY.9379 (Outlet boxes and fittings classified for fire resistance)
