




**ALLIED
MOULDED
PRODUCTS, Inc.**

**419-636-4217
222 N. Union St.
Bryan, OH 43506**

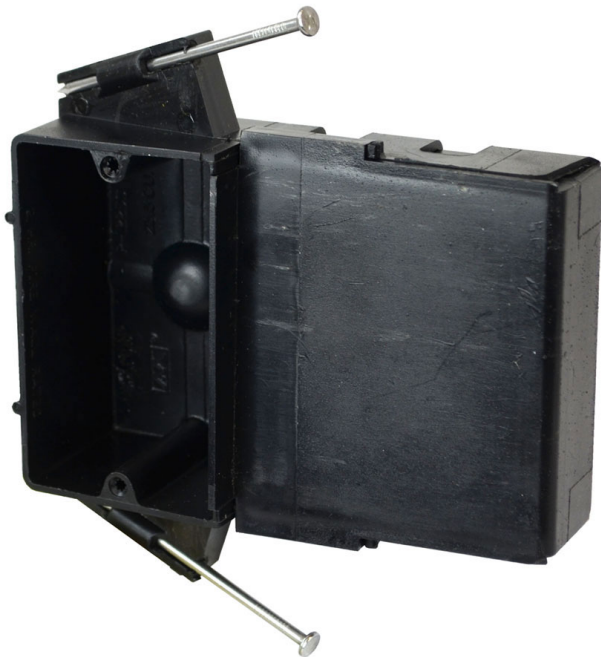

Product Info

Brand: flexBOX

UPC: 85339249146

UNSPSC: 39121309

Carton Weight: 9 lbs

Carton Length: 18 in

Carton Width: 16 in

Carton Height: 10 in

Country of Origin: United States of America

Color: Black

Patents: U.S. Patent No. 8,143,518

Material: Polyvinyl Chloride

Additional Materials: Carbon steel fasteners

P-122SC

Single gang electrical box for use with nonmetallic sheathed cable

Carton Quantity: 24

Mounting Description: Angled mid nails with two optional bottom mount recessed buttons

Box Type: Wall - Switch/Receptacle

Box Features: Nails

Installation Type: New Work

Height: 3-3/4 in

Width: 2-9/32 (5-1/2) in

Depth: 1-3/4 in

Volume: 23.5 cu in

Number of Gangs: 1

Features:

Molded-in splined device holes, offset gauge marks, leveling ribs, cover and pocket for additional cubic inch fill in shallow walls

Application:

New work residential construction 2 HR fire resistive walls (shallow 1" x 2") & ceilings

Standards:

ANSI / UL 514C: [File No. E30594](#)



LISTED

 **WARNING** - PROP 65
[Click here for more information!](#)

Fire Classification:

Fire Test of Building Construction Materials
ANSI / UL 263: File No. CEYY.R9379 (Category / File No.)

Note: Products must also be certified to: ANSI / UL 514C

Fire Resistance Classification in Wall Assemblies 2-Hours or less

Shall be separated by a horizontal distance of not less than 24 inches

Fire Resistance Classification in Floor-Ceiling

Assemblies 2-Hours or Less

Distance between boxes must be 4-½ feet from one another

Note: For more details please refer to the UL fire resistive directory and Allied Moulded's CEYY.9379 (Outlet boxes and fittings classified for fire resistance)
