




**ALLIED  
MOULDED  
PRODUCTS, Inc.**

**419-636-4217  
222 N. Union St.  
Bryan, OH 43506**

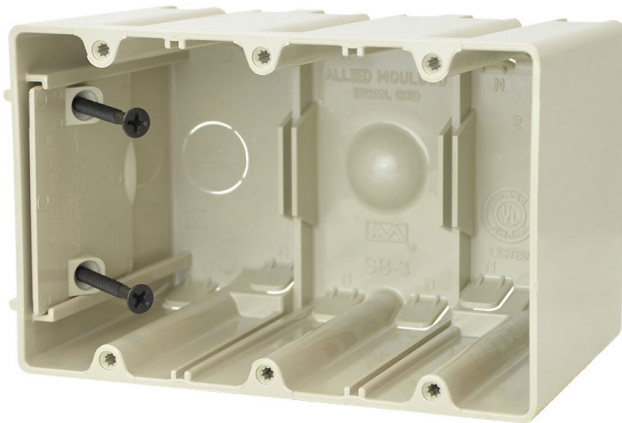

## SB-3

Three gang adjustable electrical box for use with nonmetallic sheathed cable

**Carton Quantity:** 6

**Mounting Description:** 2 Screws

**Box Type:** Wall - Switch/Receptacle

**Box Features:** Adjustable box (SLIDERBOX®), Screws

**Installation Type:** New Work, Old Work

**Height:** 3-3/4 in

**Width:** 5-13/16 in

**Depth:** 3-9/16 in

**Volume:** 61 cu in

**Number of Gangs:** 3

## Product Info

**Brand:** SLIDERBOX

**UPC:** 85339945024

**UNSPSC:** 39121308

**Carton Weight:** 3 lbs

**Carton Length:** 13 in

**Carton Width:** 12 in

**Carton Height:** 5 in

**Country of Origin:** United States of America

**Color:** Beige

**Patents:** U.S. Patent No. 7,855,338, U.S. Patent No. 6,365,831 B1

**Material:** Polycarbonate

**Additional Materials:** Carbon steel fasteners

## Features:

Molded-in splined device holes, adjustable slider plate for additional wall substrate thickness, slot provision for low voltage divider, rectangular exterior for easy cut-in, leveling ribs, offset gauge marks

## Application:

New and old work residential construction 2 HR fire resistive walls and ceilings

## Standards:

ANSI / UL 514C: [File No. E30594](#)



**LISTED**

**WARNING** - PROP 65

[Click here for more information!](#)

## Fire Classification:

### Fire Test of Building Construction Materials

ANSI / UL 263: File No. CEYY.R9379 (Category / File No.)

*Note: Products must also be certified to: ANSI / UL 514C*

### Fire Resistance Classification in Wall Assemblies 2-Hours or less

Shall be separated by a horizontal distance of not less than 24 inches

*Note: For more details please refer to the UL fire resistive*

*directory and Allied Moulded's CEYY.9379 (Outlet boxes and fittings classified for fire resistance)*

---