




**ALLIED  
MOULDED  
PRODUCTS, Inc.**

**419-636-4217  
222 N. Union St.  
Bryan, OH 43506**

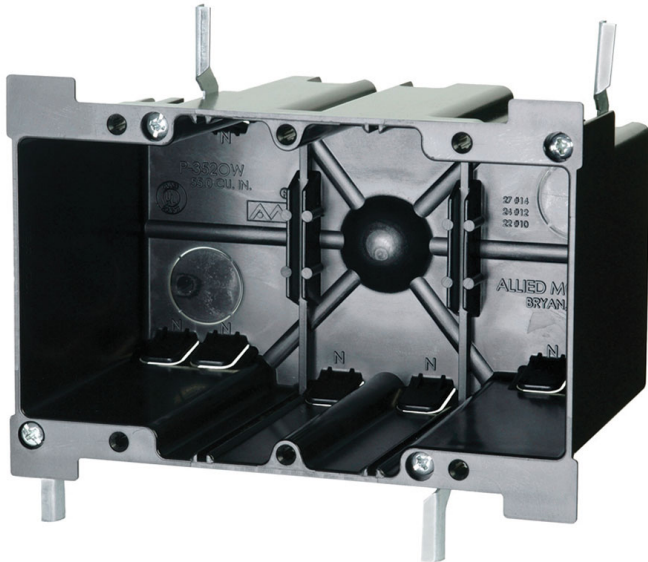

## P-3520W

Three gang electrical box for use with nonmetallic sheathed cable

**Carton Quantity:** 12

**Mounting Description:** Metal wing brackets/nonmetal ears wall compression

**Box Type:** Wall - Switch/Receptacle

**Box Features:** Nonmetal ears, Wing bracket

**Installation Type:** Old Work

**Height:** 3-11/16 in

**Width:** 5-15/16 in

**Depth:** 3-3/8 in

**Volume:** 55 cu in

**Number of Gangs:** 3

## Product Info

**Brand:** flexBOX

**UPC:** 85339332015

**UNSPSC:** 39121308

**Carton Weight:** 6 lbs

**Carton Length:** 14 in

**Carton Width:** 12 in

**Carton Height:** 8 in

**Country of Origin:** United States of America

**Color:** Black

**Patents:** U.S. Patent No. 6,365,831 B1

**Material:** Polycarbonate

**Additional Materials:** Galvanized steel brackets and plated carbon steel fasteners

## Features:

Molded-in spline device holes, slot provision for low voltage divider, rectangular exterior for easy cut-in

## Application:

Old work residential construction 2 HR fire resistive walls

## Standards:

ANSI / UL 514C: [File No. E30594](#)



**LISTED**

**⚠ WARNING - PROP 65**  
[Click here for more information!](#)

## Fire Classification:

### Fire Test of Building Construction Materials

ANSI / UL 263: File No. CEYY.R9379 (Category / File No.)

*Note: Products must also be certified to: ANSI / UL 514C*

### Fire Resistance Classification in Wall Assemblies 2-Hours or less

Shall be separated by a horizontal distance of not less than 24 inches

*Note: For more details please refer to the UL fire resistive*

*directory and Allied Moulded's CEYY.9379 (Outlet boxes and fittings classified for fire resistance)*

---