




**ALLIED  
MOULDED  
PRODUCTS, Inc.**

**419-636-4217  
222 N. Union St.  
Bryan, OH 43506**

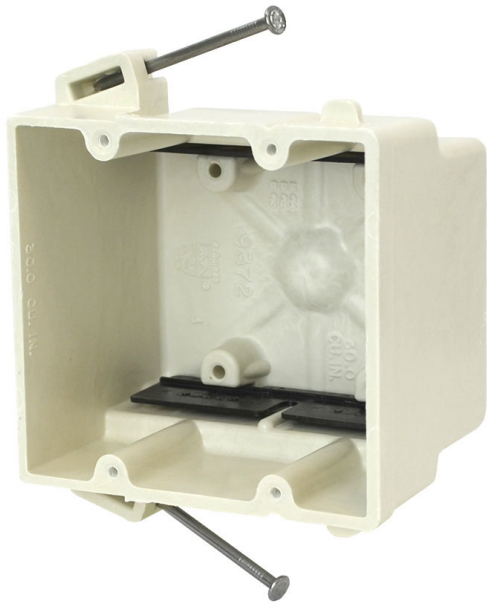

## Product Info

**Brand:** fiberglassBOX

**UPC:** 85339106838

**UNSPSC:** 39121309

**Carton Weight:** 26 lbs

**Carton Length:** 17 in

**Carton Width:** 12 in

**Carton Height:** 16 in

**Country of Origin:** United States of America

**Color:** Off white

**Material:** Fiberglass reinforced polyester

**Additional Materials:** Carbon steel fasteners, Polyvinyl chloride clamps

## 9372-NMHK

Two gang electrical box for use with nonmetallic sheathed cable

**Carton Quantity:** 48

**Closure Type:**

**Mounting Description:** Angled mid nails with 3/16" panel stops opposite side

**Box Type:** Wall - Switch/Receptacle

**Box Features:** Speed "K" nonmetallic clamps, Nails

**Installation Type:** New Work

**Height:** 3-3/4 in

**Width:** 4 in

**Depth:** 2-3/4 in

**Volume:** 30 cu in

**Number of Gangs:** 2

### Features:

Machine tapped device holes, 3/16" panel stops, leveling ribs, rigid hard box construction, no distortion with high temperatures, shatter resistant with low temperatures, Speed "K" Clamps factory installed

### Application:

Manufactured housing construction 2 HR fire resistive walls

### Standards:

ANSI / UL 514C: [File No. E30594](#)



### Fire Classification:

#### Fire Test of Building Construction Materials

ANSI / UL 263: [File No. CEYY.R9379](#) (Category / File No.)

*Note: Products must also be certified to: ANSI / UL 514C*

#### Fire Resistance Classification in Wall Assemblies 2-Hours or less

Shall be separated by a horizontal distance of not less than 3 inches

*Note: For more details please refer to the UL fire resistive directory and Allied Moulded's CEYY.9379 (Outlet boxes and fittings classified for fire resistance)*