




**ALLIED
MOULDED
PRODUCTS, Inc.**

**419-636-4217
222 N. Union St.
Bryan, OH 43506**

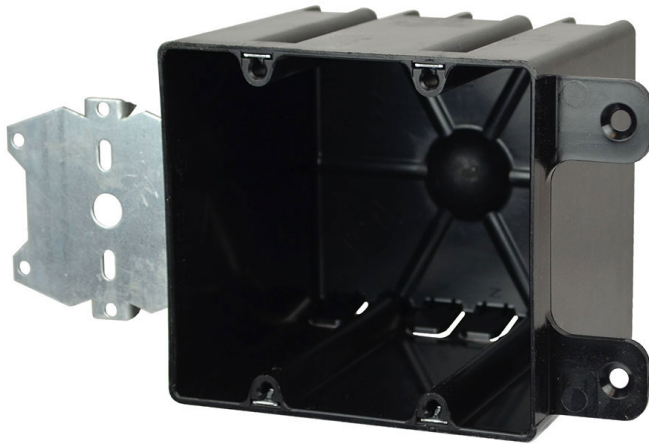

P-442HQT

Two gang electrical box for use with nonmetallic sheathed cable

Carton Quantity: 48

Closure Type:

Mounting Description: Stud face mount steel hanger bracket with 1/2" offset and opposite side drywall tabs

Box Type: Wall - Switch/Receptacle

Box Features: "HL" hanger

Installation Type: New Work

Height: 3-3/4 in

Width: 4 in

Depth: 3-9/16 in

Volume: 43 cu in

Number of Gangs: 2

Product Info

Brand: flexBOX

UPC: 85339440031

UNSPSC: 39121308

Carton Weight: 20 lbs

Carton Length: 18 in

Carton Width: 16 in

Carton Height: 15 in

Country of Origin: United States of America

Color: Black

Patents: U.S. Patent No. 6,365,831 B1

Material: Polycarbonate

Additional Materials: Galvanized snap in bracket

Features:

Quick Thread device holes, leveling ribs

Application:

New work residential construction 2 HR fire resistive walls

Standards:

ANSI / UL 514C: [File No. E30594](#)



LISTED

⚠ WARNING - PROP 65
[Click here for more information!](#)

Fire Classification:

Fire Test of Building Construction Materials

ANSI / UL 263: File No. CEYY.R9379 (Category / File No.)

Note: Products must also be certified to: ANSI / UL 514C

Fire Resistance Classification in Wall Assemblies 2-Hours or less

Shall be separated by a horizontal distance of not less than 24 inches

Note: For more details please refer to the UL fire resistive directory and Allied Moulded's CEYY.9379 (Outlet boxes

and fittings classified for fire resistance)
