

## The Two Newest Additions to the SLIDERBOX® Line

*The 1099-AB* was released in 2023 as an addition to Allied Moulded's SLIDERBOX® series of adjustable wall boxes. The single gang receptacle is made with fiberglassBOX® material meant for old work projects.

*Some features include:*

- No putty pad is needed when following the Uniform Building Code (3" minimum horizontal distance between boxes)
- Sound rated up to STC (Sound Transmission Class) rating of 54
- 0"-2" of adjustability to fit most wall finishes and arrives preset for 1/2" standard drywall applications
- 6-32 UNC tapped holes for easy device mounting
- Corrosion resistant metal bracket for a solid hold to a wood or metal wall stud
- **One screw design for easy adjustability**
- **Knockout for a 1/2" NM connector**

### CONSTRUCTION

- Fiberglass reinforced polyester
- Galvanized steel brackets
- Plated carbon steel fasteners
- PVC Clamps

### 2024 EC&M CATEGORY WINNER

In 2024, the 1099-AB was voted category winner for Boxes and Enclosures through Electrical Construction & Maintenance (EC&M) trade publication.

**EC&M.**  
**Product of the Year**  
2024 Category Winner



### MEASUREMENTS

- Height: **3.83 in**
- Width: **3.375 in**
- Depth: **3.563 in**
- Volume: **22.5 cu in**
- Number of Gangs: **1**

### STANDARDS

- ANSI / UL 514C: File No. E30594
- UL Listed

### FIRE CLASSIFICATION

**Fire Test of Building Construction Materials**  
ANSI / UL 263: File No. CEYY.R9379 (Category / File No.)


*Note: Products must also be certified to: ANSI / UL 514C*

**Fire Resistance Classification in Wall Assemblies 2-Hours or less**

Shall be separated by a horizontal distance of not less than 3 inches

*Note: For more details please refer to the UL fire resistive directory and Allied Moulded's CEYY.9379 (Outlet boxes and fittings classified for fire resistance)*

## The Two Newest Additions to the SLIDERBOX® Line

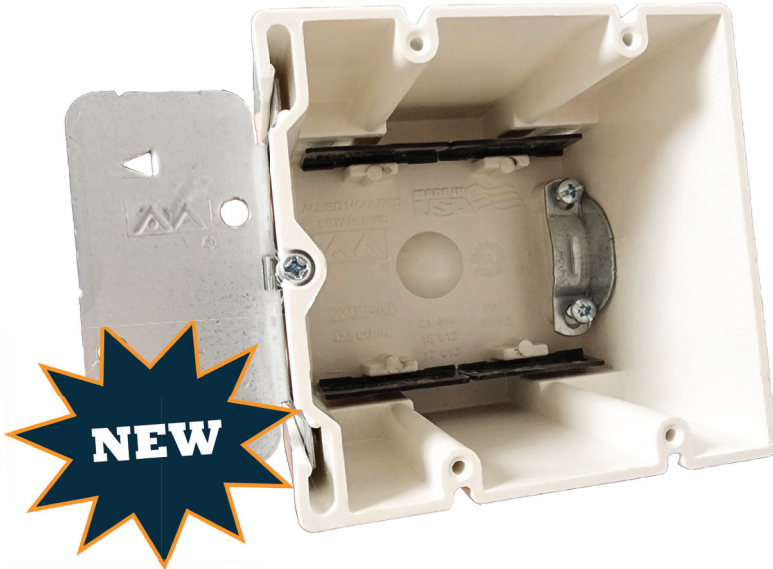

The **2302-ABKSC** is the newest addition to Allied Moulded's SLIDERBOX® series of adjustable wall boxes, having been released in August of 2024. As the two-gang version of the 1099-AB, the receptacle shares many qualities, including its durable fiberglassBOX® material. However, the 2302-ABKSC features new technology with the ability to revolutionize the world of EV chargers.

These features include:

- **220V clamp for 6-8 AWG NM wire**
- **(4) Clamps for 10-14 AWG NM wire**
- **\*No putty pad or sound pad required**
- **0"-2" of travel for adjustability**

*\*Must maintain 3" of horizontal separation and following local building codes*



*Both the 1099-AB & 2302-ABKSC are proudly made in the U.S.A.*

### CONSTRUCTION

- Fiberglass reinforced polyester
- Galvanized steel brackets
- Plated carbon steel fasteners
- PVC Clamps

### MEASUREMENTS

- Height: **3.86 in**
- Width: **4.03 in**
- Depth: **3.63 in**
- Volume: **42.5 cu in**
- Number of Gangs: **2**

### STANDARDS

- ANSI / UL 514C: File No. E30594
- UL Listed

### FIRE CLASSIFICATION

#### Fire Test of Building Construction Materials

ANSI / UL 263: File No. CEYY.R9379 (Category / File No.)

*Note: Products must also be certified to: ANSI / UL 514C*

#### Fire Resistance Classification in Wall Assemblies 2-Hours or less

Shall be separated by a horizontal distance of not less than 3 inches

*Note: For more details please refer to the UL fire resistive directory and Allied Moulded's CEYY.9379 (Outlet boxes and fittings classified for fire resistance)*

### CONTACT INFORMATION

Allied Moulded Products Inc.  
222 North Union Street  
Bryan, OH 43506 USA

**Phone: 1-800-722-2679**

**Fax: 1-800-237-7269**

**Email: [sales@alliedmoulded.com](mailto:sales@alliedmoulded.com)**

[www.alliedmoulded.com](http://www.alliedmoulded.com)