
ALLIED MOULDED PRODUCTS, Inc.

419-636-4217
222 N. Union St.
Bryan, OH 43506

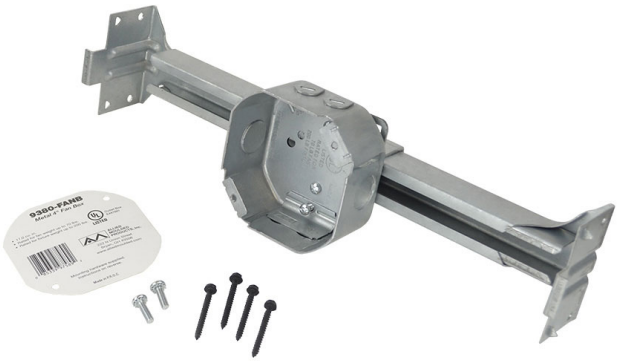

9380-FANB

Octagonal steel fan/fixture support box for use with nonmetallic sheathed cable

Carton Quantity: 12

Mounting Description: Adjustable bar hanger - 16" to 24" on center joist application

Box Type: Ceiling - Fan/Fixture

Box Features: Bar hanger

Installation Type: New Work

Width: 4 in

Depth: 1-3/4 in

Volume: 17 cu in

Fan Rating: 70lbs

Fixture Rating: 200lbs

Product Info

UPC: 85339975892

UNSPSC: 39121316

Carton Weight: 26 lbs

Carton Length: 16 in

Carton Width: 16 in

Carton Height: 8 in

Country of Origin: China

Color: Silver

Material: Galvanized steel

Additional Materials: Galvanized steel brackets and plated carbon steel fasteners

Box Diameter: 4

Features:

Machine tapped fixture holes, steel box construction, universal bar hanger, steel clamps factory installed.

Application:

New work residential construction 2 HR fire resistive walls and ceilings (70 lbs. fan support and 200 lbs. fixture support)

Box Diameter: 4

Standards:

ANSI / UL 514A: File No. E487601

UL LISTED

WARNING – PROP 65
Click here for more information!

Fire Classification:

Fire Test of Building Construction Materials – (Outlet Boxes and Fittings) Metallic Outlet Boxes (QCIT)

Use In Fire-Rated Assemblies

Certified metallic outlet and switch boxes with metallic or nonmetallic cover plates may be used in floor-ceiling and roof-ceiling assemblies with ratings not exceeding 2 h

when these assemblies have gypsum wallboard membranes. The boxes are intended to be fastened to the joists with the openings in the wallboard facing cut so that the clearance between the boxes and the gypsum wallboard does not exceed 1/8 in. The boxes are inteded to be installed so that the surface area of individual boxes does not exceed 16 sq in, and the aggregate surface area of the boxes does not exceed 100 sq in per 100 sq ft of ceiling surface.